



x | ä ä
 x É v ý ß
 x < ² ° O ò w U ² ° ¼ • g * : Ñ _ h
 x Ý z - Ñ ô ‡ =
 x ...^a ' y [% Q < » % Q <
 x ¶ • y ' y “ ‘ k 9 ‘ k ? è ‘
 x / 6 9 ; 2 t D Ó k B x ~ ê Ë
 x 9 + 2 <
 x U 9 è) R G Y Y / * O \ O Y O U T . • « `



+ ; * 9 ^ ^ ^ * : 9 : ' © ç = É v Ü ~ D } k ç ý µ 9 8 < G I k Ä Ä Ý ä
 ä œ fo ž 4 © ç D } © W J s ° k ä Ô ° k ñ « ° C è ° ^ • ò — (k ç 9 : ' ³ ² ° Ñ _ k ò
 * : ' < ² ° Ñ _ w Ä Ä U ² ° ¼ • k - Ñ ô zo ž Ý ä | ä k - Ø Ù Ó — (k ' ñ
 • ½ k â Ý ^a U ä 4 D } U ' Á k w • x 4 D } . xo ž ¶ • y ' k , ...^a ' o • 9 ' o • ? è '
 C “ ‘ k ¾ © ' š 4 4 . D } — ž I ô o ž

					9 I	9 D F	
700 mA	90 ~ 305 Vac 127~300 Vdc	143~286Vdc	200 W	93.5%	0.99	0.96	EUD-200S070DT(ST)-00A0
1050 mA	90 ~ 305 Vac 127~300 Vdc	95~190Vdc	200 W	93.5%	0.99	0.96	EUD-200S105DT(ST)-00A0
1400 mA	90 ~ 305 Vac 127~300 Vdc	71~142Vdc	200 W	93.0%	0.99	0.96	EUD-200S140DT(ST)-00A0
2100 mA	90 ~ 305 Vac 127~300 Vdc	47~ 95 Vdc	200 W	93.0%	0.99	0.96	EUD-200S210DT(ST)-00A0 ⁽⁴⁾
2450 mA	90 ~ 305 Vac 127~300 Vdc	41~ 82 Vdc	200 W	93.5%	0.99	0.96	EUD-200S245DT(ST)-00A0 ⁽⁴⁾

4900 mA	90 ~ 305 Vac 127~300 Vdc	21~ 41 Vdc	200 W	92.0%	0.99	0.96	EUD-200S490DT(ST)-00A0 ⁽⁴⁾
---------	-----------------------------	------------	-------	-------	------	------	---------------------------------------

g h ; 2 ,)) • š 9 8 y < G I ê < J I ! ç U y < G I ê < J I
 g h y i Ú ^ y < G I k ç ú
 g h ñ Ä ° Z @] B ± 1 9 • š k ” + ; * 9 * : 9 : '
 g h 9 + 2 < ý ß



2008 (S) -00A0 R H

98	90 Vac	-	305 Vac	
98	127 Vdc	-	300 Vdc	
8	47 Hz	-	63 Hz	
	-	-	0.75 MIU	UL8750: 277Vac/60Hz, Ä I N ^a
v	-	-	2.4 A	ú k 100Vac
	-	-	1.2 A	ú k 220Vac

~ ... vg/ Zh

Å



ä @120Vac I _o = 700 mA I _o = 1050 mA I _o = 1400 mA I _o = 2100 mA I _o = 2450 mA I _o = 2800 mA I _o = 4200 mA I _o = 4900 mA	88.0% 88.0% 87.0% 87.0% 88.0% 86.0% 87.5% 87.0%	91.0% 91.0% 90.0% 90.0% 91.0% 89.0% 90.5% 90.0%	- - - - - - - -	ž ú k q ê “ z Ò Ñ ž k ä ‘ z³
ä @220Vac I _o = 700 mA I _o = 1050 mA I _o = 1400 mA I _o = 2100 mA I _o = 2450 mA I _o = 2800 mA I _o = 4200 mA I _o = 4900 mA	91.5% 91.5% 91.0% 91.0% 91.5% 90.5% 91.0% 90.0%	93.5% 93.5% 93.0% 93.0% 93.5% 92.5% 93.0% 92.0%	- - - - - - - -	ž ú k q ê “ z Ò Ñ ž k ä ‘ z³
ä @277Vac I _o = 700 mA I _o = 1050 mA I _o = 1400 mA I _o = 2100 mA I _o = 2450 mA I _o = 2800 mA I _o = 4200 mA I _o = 4900 mA	92.0% 91.5% 91.0% 91.0% 91.5% 91.0% 91.5% 90.5%	94.0% 93.5% 93.0% 93.0% 93.5% 93.0% 93.5% 92.5%	- - - - - - - -	ž ú k q ê “ z Ò Ñ ž k ä ‘ z³
- Ñ ô	-	-	1 W	< G I . ` z 2° ¼ •
u ® — { ž ž •	-	341,000 Hours	-	< G I ê “ - ž ú 3/2 . * (1
. x ž •	-	120,000 Hours	-	< G I k ž ú k Ó “ - k Õ - @ Á . x ¼ ž
• Ó “	-40°C	-	+87 ℄	
Ä ‘ Ó “	-40°C	-	+70 ℄	~ † 10%RH to 95%RH
¥ “ †	-40°C	-	+85°C	~ † 5%RH to 95%RH
> * 6 * 2 ~ = ~ . D œ 2 ~ = ~ .				m 5 ö > * y ~ ~ ~ ~
Ô M	-	1200 g	-	

"

"



d < i Å Ý 9	-20 V	-	20 V	
d < i v	90 µA	120 µA	150 µA	
2° ÿ ß 8	10%I _o	-	100%I _o	
P < 2° ÿ µ	0 V	-	10 V	
¼ • 9	0.2 V	0.4 V	0.6 V	
• o 9	0.4 V	0.6 V	0.8 V	
ÿ	-	0.2 V	-	

UL/CUL	UL8750, CAN/CSA-C22.2 No. 250.13
CE ⁽¹⁾	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
KS	KS C 7655
EN 55015 ⁽²⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽²⁾	ANSI C63.4 Class B This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
(O 6	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV ⁽³⁾
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS

"

"

2008

(S)-00A0

R H


"

"

"




200D (S)-00A0 R H

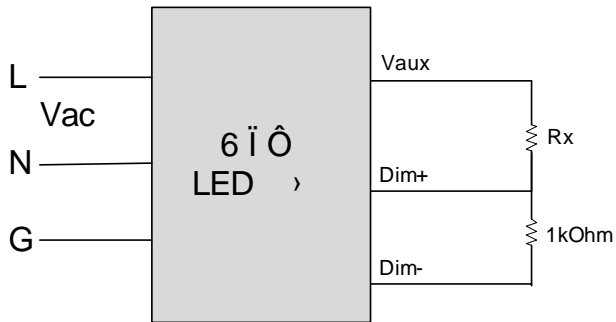

1²° a ž * OS Nňÿß ž < êñ < k k é Ü ~ — c 3 o W • ož
 U < 9 ' Z › êñ — » ^ k A ò I 9 ' k Û Á W 2 ° ~ ož
 2° ... ž k * OS ž U Ô q ož

Z

3 ° ° I † - } ë k - @ ð Y N ž • c o ž U Y * % 2 • ¼ y Ð ~ Û ø • ê ¼ {
 2 + * Á ϕ — Ō ož

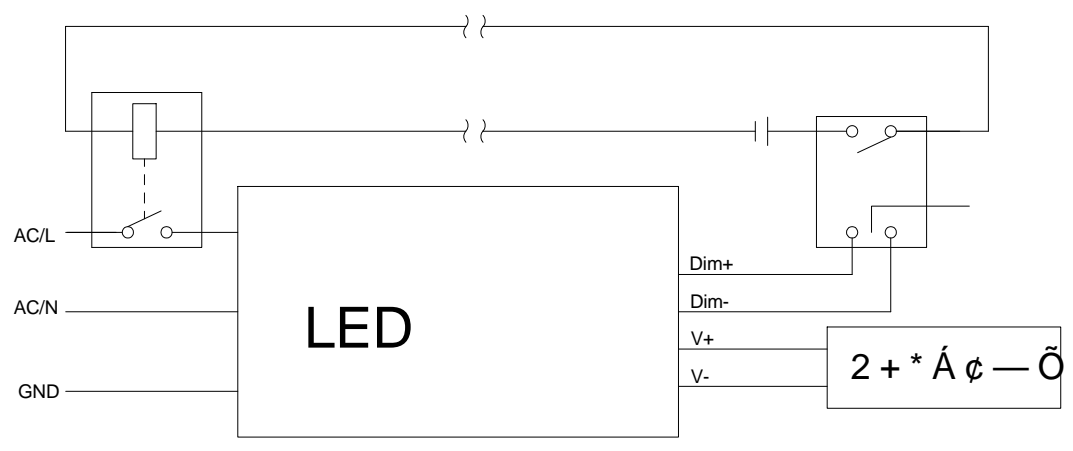

"

"

~~2000~~

(S)-00A0

R H

"

"

"

ZZZ LQYHQWURQLFV FR 7FR0



	'	Gg		
	(D}ÔÅ	... ^a y ç + ç 1 < ç + ^a 1 <	•í
		D}ÔÅ	U 9. • «`	U 9 è)RGYY / *O\OYOUT . • «`
		ÿß v¼f VQ VQ	ÿß v¼f VQ VQ	Ëÿß v¼f VQ VQ
		" .` ÿß v¼f VQ VQ		•í
		Ó“	Ó“	•Ó“
		Å‘Ó“	"	•í
		• "	¥ “†	•í
		êË}L		í”
		¶ MÃ öÖ	EN 55015 EN 61000-3-2 EN 61000-3-3	í”
		‘ì¼ ç	í”	
	C) + 0• 1 9	"	•í
		° Z		¾ •
		Ù NY •		
		¶ MÃ öÖ		¾ •
		Ñ ã £		¾ •
	*	• "	m 5 ö > *	¾ •
		¶ MÃ öÖ		¾ •
	+	Ñ ã £		¾ •
	,	~ ... vg/ Zh		¾ •
		Ñ ã £		¾ •
	-	CB ö œ	"	•í
		D}ÔÅ	... ^a	¾ •
		D}T	• êË	¾ •
		ÿµÅ g ä œ f È´fâ1h	.`	•í
		¶ MÃ öÖ	; 2) ; 2	¾ •
		¶ MÃ öÖ)(•í



"

2008 (S)-00A0 R H

	-	¶ MÃ öÖ	19	¾ •
		¶ MÃ öÖ ,)		¾ •
		¶ MÃ öÖ	+ 4	¾ •
		Ñã£		¾ •
		...` 8U.9 }L		¾ •
	.	¶ MÃ öÖ hg h		•í
		° I †		•í